


*Designers & Manufacturers of Drilling & Tapping Solutions*

**Model LQ-7520 Self Contained, Lead Screw Operated Tapping Unit**

**Standard Features**

- Precision Thread Ground Lead Screw and Nut Assembly
- Quick Change of Lead Screw and Nut Assembly
- Tap Jam Limit Switch for No Hole or Undersize Hole Condition
- Safety Return Override Limit Switch to Prevent Jamming of the Lead Screw
- Alloy Aluminum Main Body
- Large Quill Diameter and Quill Bearings
- All Ball Bearing, Spline Driven
- ASA I.D. Spindle
- Mounting for Multi Spindle Head
- Enclosed Belt Guard
- Conveniently Located Control Dogs
- Heavy-Duty Motor Mounting bracket with Jack Screw Assembly

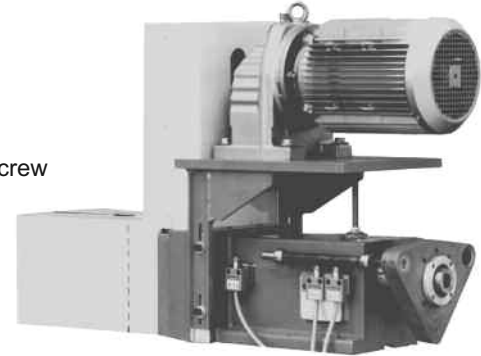

Also available as a vertical tapping machine

<b>STROKE</b>	<b>0 - 6 INCHES &amp; 0-9 INCHES</b>
<b>LEAD SCREW PITCH</b>	<b>6 TO 32</b>
<b>DRIVE SHAFT</b>	<b>1-3/16 INCHES</b>
<b>DIAMETER OF QUILL</b>	<b>3 INCHES</b>
<b>MOTOR HORSE POWER</b>	<b>1 TO 7-1/2</b>

